# Wetland/wetland Buffer Mitigation Plan

## for 42 Deepwood Road in Darien, CT

By Aleksandra Moch, Wetland Scientist and Landscape Designer, June 16, 2021

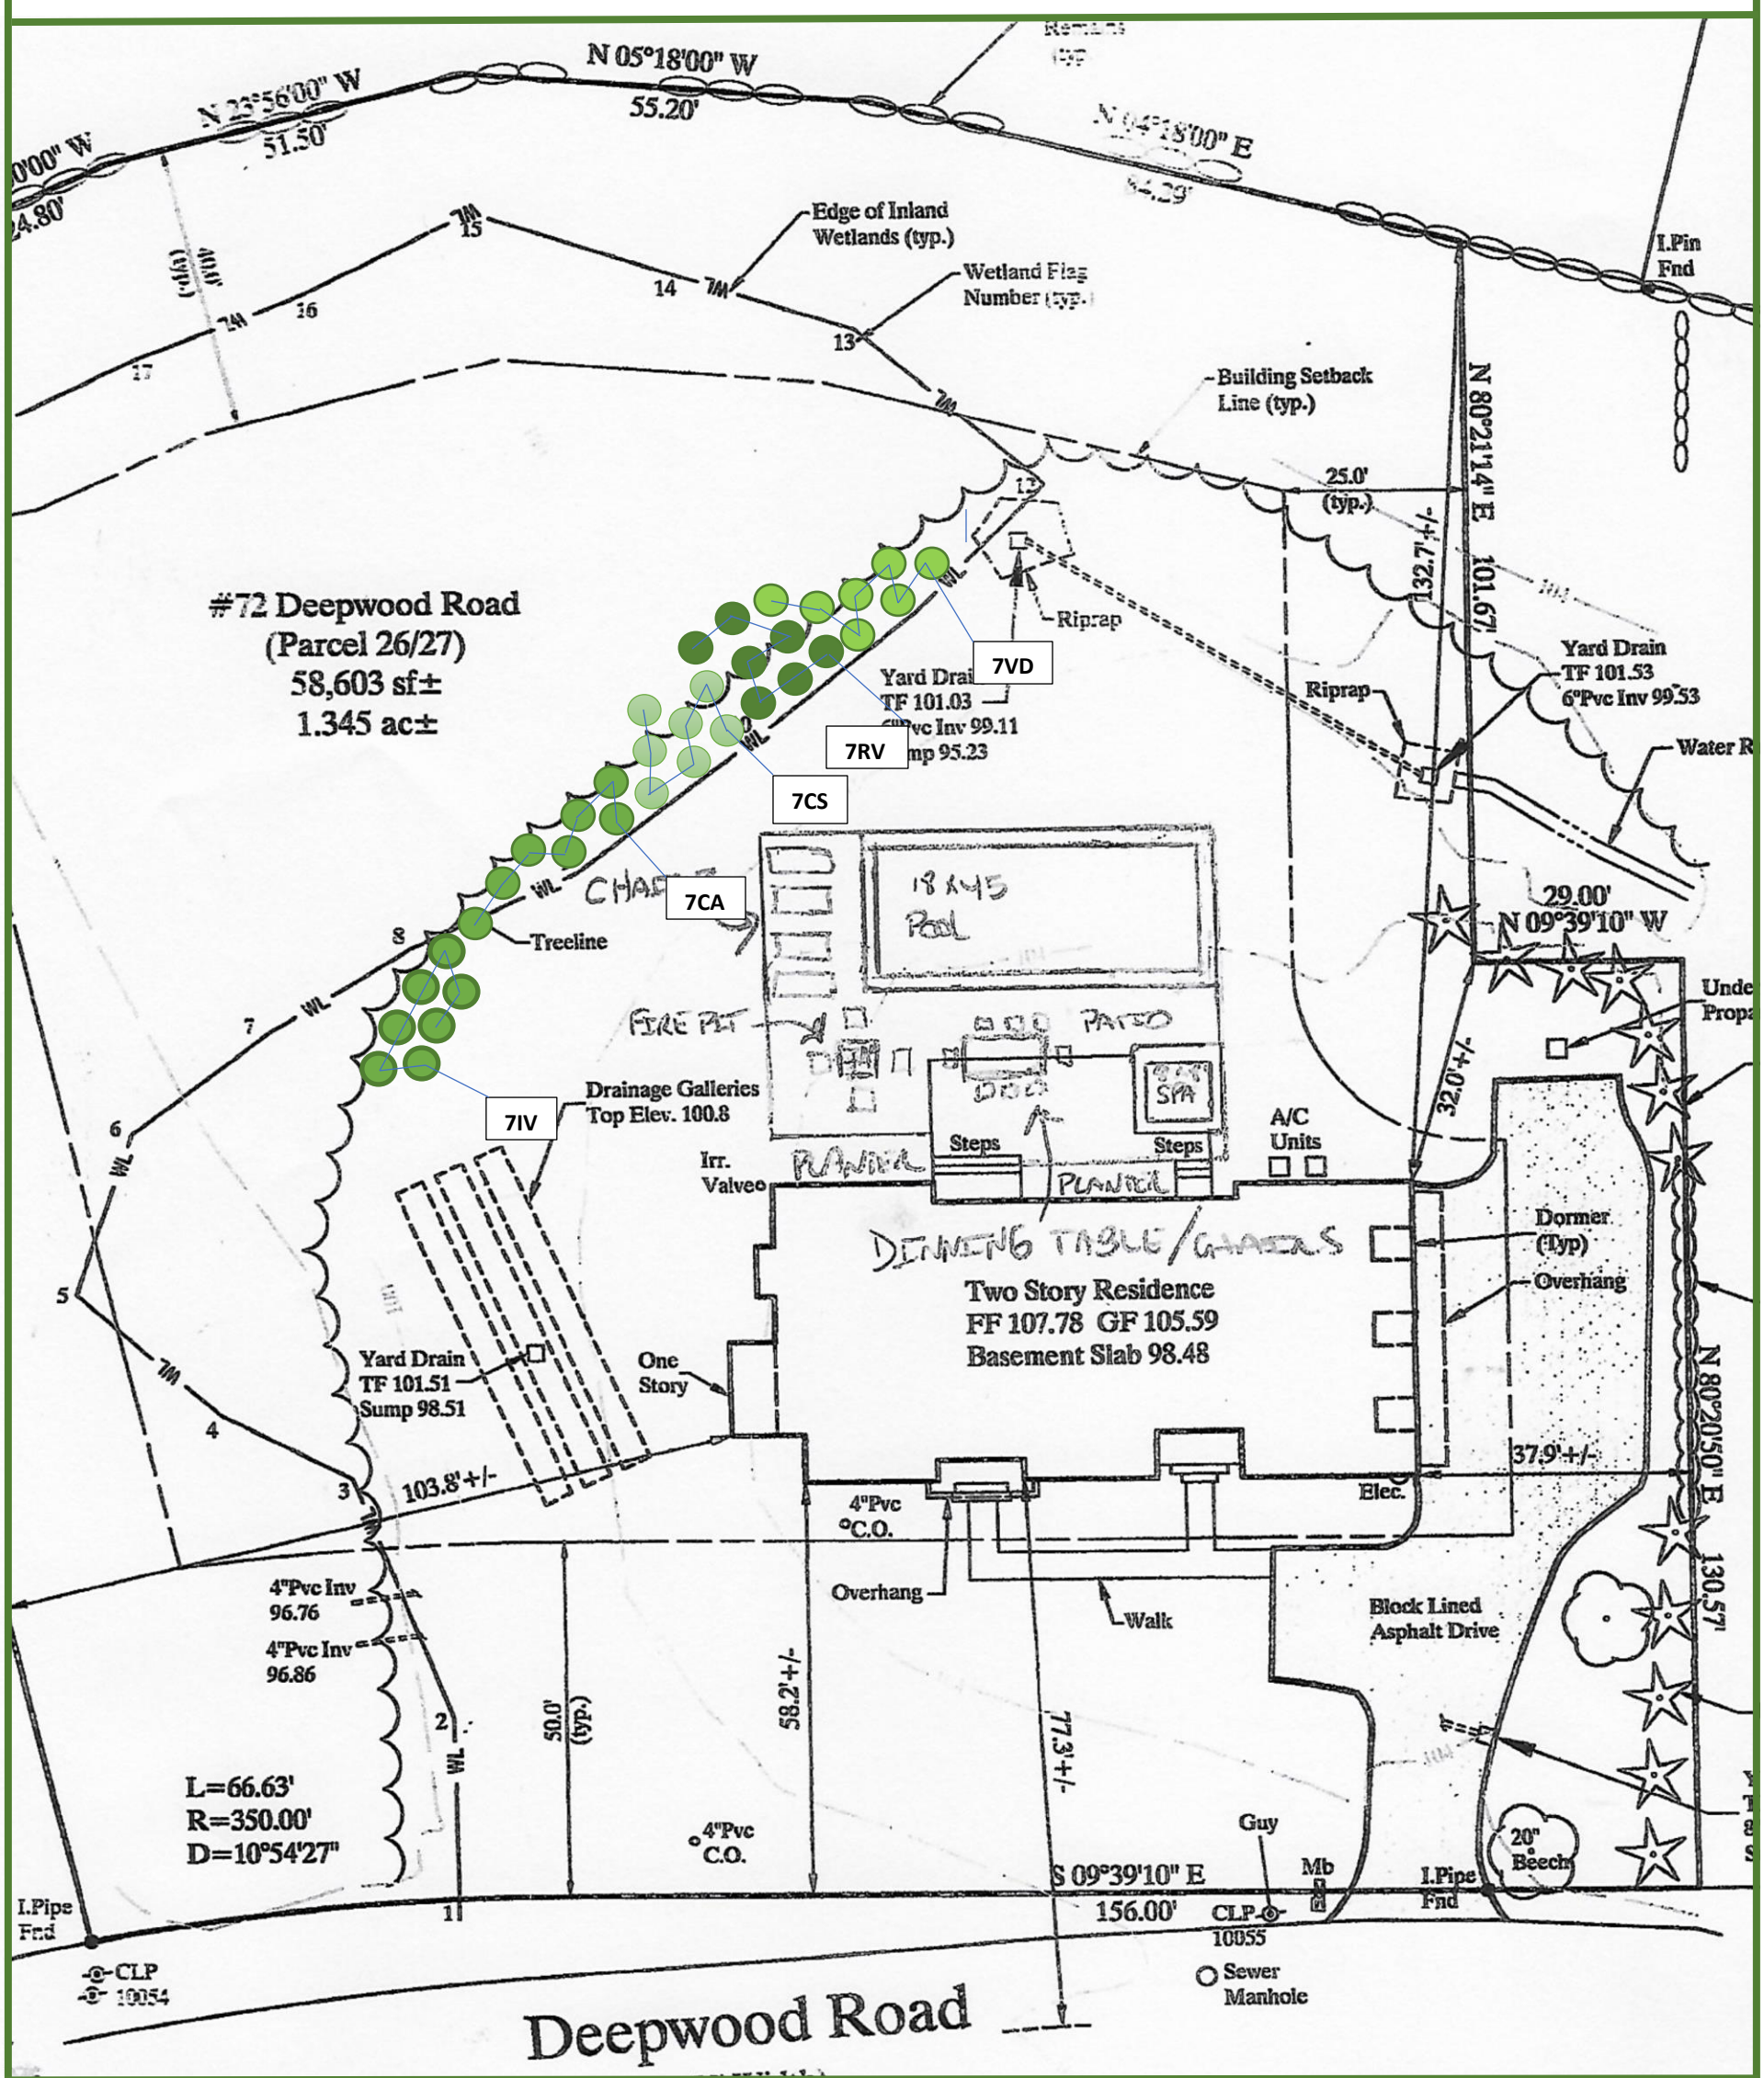


## PLANTING SCHEDULE

| QTY | KEY | BOTANICAL/COMMON NAME | SIZE | ROOT |
|---|---|---|---|---|
| 7 | CS | Cornus servicea / Red osier dogwood | 3’-4’ | Cont. |
| 7 | CA | Clethra alifolia / Summersweet | 2’-3’ | Cont. |
| 7 | VD | Viburnum dentatum / Arrowwood viburnum | 3’-4’ | Cont. |
| 7 | IV | Ilex verticillate / Winterberry | 2’-3’ | Cont. |
| 7 | RV | Rhododendron viscosum / Swamp azalea | 2’-3’ | Cont. |